



PCT/GB 2004 / 0 0 0 0 3 2

07 JANUARY 2004

INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D 03 FEB 2004  
WIPO

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*[Signature]*

Dated 23 December 2003

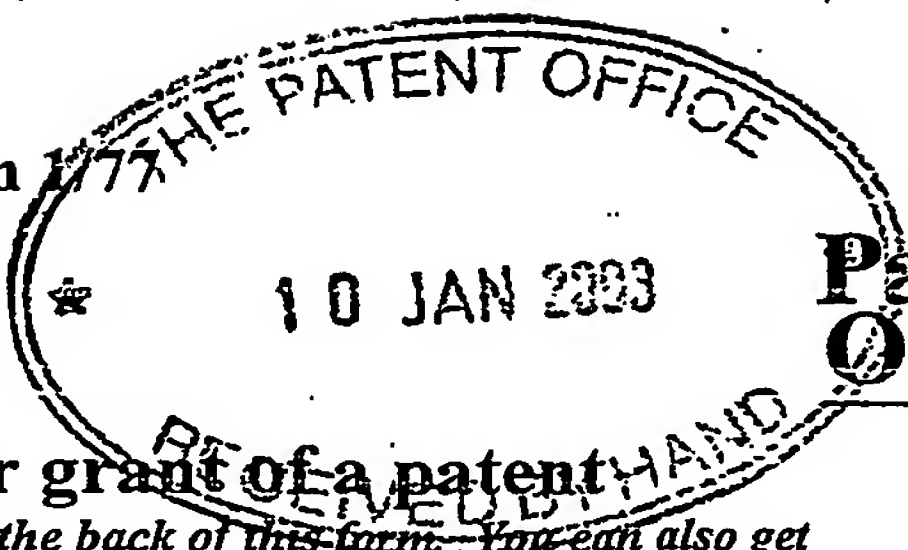

The  
Patent  
Office

13 JAN 03 E776364-4 C03008  
P01/7700 0.00-0300628.5

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference SH-58186

2. Patent application number  
(The Patent Office will fill in this part)

10 JAN 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Martin MYERSCOUGH  
Crosstrees  
Broom Heath  
Woodbridge  
Suffolk IP12 4DL

0300628.5

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

810230001

4. Title of the invention FASTENING DEVICE

5. Name of your agent (if you have one)

LLOYD WISE

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

COMMONWEALTH HOUSE  
1-19 NEW OXFORD STREET  
LONDON  
WC1A 1LW

Patents ADP number (if you know it)

117001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications (and if you know it) the or each application number

Country

Priority application  
number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description 13

Claim(s) 5

Abstract

Drawing(s) 3 <sup>13</sup>

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translation of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature



Date

10 January 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

STEVEN HOWE

020 7571 6200

**Warning**

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay, please contact the Patent Office.

DUPLICATE

### FASTENING DEVICE

It is well known to join a number of items, such as two or more sheets of paper, together using a staple. A staple is usually in the form of a generally U-shaped piece of wire. The legs of the staple are driven through the items to be joined, and are then deformed on the rear of the items being joined to hold these together as a unitary item. The free ends of the legs may be pointed to assist with the penetration of the items to be joined.

Staples are usually provided as a stick or strip of U-shaped staples joined together by a frangible bridge. To staple items together, a stick or strip of staples are provided in a stapling machine or stapler. The stapler includes a means for removing one of the staples from the stick or strip of staples, driving the legs of the removed staple through the items to be joined, and deforming the legs of the staple that have passed through the items to be joined.

One disadvantage in joining items together with a staple is that it can be difficult to remove the staple to separate the items, especially without causing damage to the items. To remove a staple, it is necessary to bend the deformed legs of the staple straight, and then pull the staple from the items that were joined by the staple. However, it can be difficult to straighten the legs of the staple. Even if the legs are straightened, it can be difficult to grasp the staple to pull this from the items that were joined by the staple. Especially if the legs of the staple are not straightened, the removal of the staple is liable to damage the items held by the staple, for example by tearing these.

There are a number of tools that have been developed to assist with the removal of staples. However, these tools are not always available when it is necessary to remove a staple. Further, these tools are not always able to cleanly remove a staple without damage to the items held by the staple.



GB-A-2252748 discloses an adjunct for use with a staple. The adjunct is formed as a moulded one-piece construction comprising a first panel and a second panel linked by a live hinge. In use, the adjunct is applied to a plurality of paper sheets by folding it along the hinge such that the plurality of sheets is sandwiched between the first and second panels. Using a conventional stapler, a staple is then driven through the adjunct and the plurality of sheets simultaneously. To remove the staple, turn-up-tabs formed on each of the first and second panels of the adjunct are pulled away from the paper to open the adjunct. This causes the legs of the staple to unfold and straighten. The base of the staple is connected to the adjunct, and so continued pulling of the adjunct removes the staple from the sheets of paper, allowing these to be separated. In this way, it is possible to easily remove a staple without requiring additional tools, and without causing unnecessary damage to the sheets of paper held by the staple. However, it is difficult and time consuming to arranging the adjunct around the sheets of paper and maintaining this arrangement whilst driving a staple through the adjunct and sheets. Accordingly, the staple adjunct shown in this prior art has not achieved commercial success.

GB 2036226 teaches a staple fastener comprising an upper element having a staple integrally formed with a cross member and a lower, receiving element. In use, the staple and cross member are arranged on one side of a number of sheets and the receiving member is arranged on the opposite side of the sheets. This system therefore does not involve the separate handling of a staple and a tab member, as is the case in GB 2252748. However, the document teaches the use of two separate members, which must be aligned precisely so that the prongs of the staple are received by the receiving member. The staple fastener has the further disadvantage that neither of the elements of the fastener are simple and cheap to produce. The document teaches that the upper element can be formed from a thermoplastics material

such that a traditional staple can be inserted therein before complete hardening of the plastics material. The lower, receiving element is formed with at least two layers, an upper layer which is soft and a lower layer which is harder. Accordingly, the fastener described in GB 2036226 suffers from the  
5 problem that the high costs involved in producing the fasteners renders their use commercially impractical.

Other types of fastener are known, for example stitches, bifurcated fasteners and the like.

According to a first aspect of the present invention, a fastening device  
10 includes a magazine holding at least one tab, the tab having a first portion and a second portion, the first and second portions being joined along a hinge such that the free ends of the first and second portions are biased away from each other, the first portion having a different size and/or shape to the second  
15 portion, the magazine including an opening through which the tab is dispensed, the opening including a retainer for retaining the second portion of the tab from moving in a first direction whilst allowing the first portion of the tab to move in the first direction, the tab being removable from the magazine in a second direction generally perpendicular to the first direction to a  
20 fastening position, and a fastening mechanism for driving joining the tab and items to be joined.

In use, the first portion of the tab passes through the opening of the magazine in a first direction whilst the second portion of the tab is retained by the retainer. The tab therefore has an open configuration. A number of items, such as a number of sheets of paper to be joined together, is provided to  
25 the fastening device, passing between the first and second portions of the tab. The continued movement of the items to be joined in a second direction acts to push the tab out of the magazine in the second direction to a fastening position. In this position, the fastening devices positions a fastener through

the items to be joined that are sandwiched by the tab. The items and tab are then removed from the fastening device. In this way, a portion of the tab is automatically positioned on either side of the items to be joined as the fastener is provided through the items to be joined in such a way that the  
5 fastener also passes through the portions of the tab.

In one example, the fastener is a staple or a similar component. In this case, the staple is driven through the tab and the items to be joined. The legs of the staple driven through the tab and items to be joined may be deformed to join the items. In this case, when the staple is to be removed, the first and second  
10 portions of the tab may be pulled apart, straightening the legs of the staple and drawing the staple through the joined items without requiring additional tools or without causing significant damage to the items joined.

In an alternative example, the fastener may be in the form of a stitch. In this case, a thread may be driven through the tab and the items to be joined a  
15 number of times. In this case, when the items are to be separated, the first and second portions of the tab may be pulled apart, breaking the thread.

The arrangement of a tab around the items to be joined and the application of a fastener to fix the tab and the items together can be achieved in a single step since the tab is simply "collected" by the sheets as the sheets move  
20 towards the fastening position. The procedure, and therefore the time taken, to fasten a tab and the items together in this way is essentially the same as that when tab is not used. This makes the dispensing of tabs in this way very cheap and commercially effective.

In a preferred embodiment of this invention, a mechanism is provided for  
25 selectively preventing the first portion of the tab from passing through the opening of the magazine. In this way, when a number of items to be joined are moved into the fastening position, the items do not pass between the first and second portions of a tab, and therefore do not engage and move a tab

into the fastening position. In this way, the items can be fastened in a conventional manner, without using a tab. This is advantageous where the additional cost or convenience of a tab in the joined article is not required. This may be achieved by mechanical means such as a manually actuated sliding member or an electronic push button to close the first opening in the magazine. Alternatively or additionally, the magazine may be removed from the fastening device when a tab is not required.

According to a second aspect of the present invention, there is provided a magazine suitable for use in a fastening device such as that according to the first aspect of the present invention. The magazine is arranged to hold at least one tab having a first portion and a second portion, the first and second portions being joined along a hinge such that the free ends of the first and second portions are biased away from each other, the first portion having a different size and/or shape to the second portion. The magazine includes an opening through which the tab is dispensed, the opening including a retainer for retaining the second portion of the tab from moving in a first direction whilst allowing the first portion of the tab to move in the first direction, the tab being removable from the magazine in a second direction generally perpendicular to the first direction.

The retainer may be in the form of one or more projections or lips that extend into the opening of the magazine for retaining the second portion of the tab. The projection or lip is advantageously arranged in a position such that, when the first and second portions of the tab are adjacent each other, the projection extends over an area of the second portion of the tab not covered by the first portion. The retainer may be a reduced width opening part of a keyway slot.

Preferably, the tab members contained in the magazine are biased towards the opening of the magazine. In one example, the tab members may be biased through gravity. However, it is preferred that the magazine includes a



resilient biasing means, such as a spring, to bias the tab members towards the opening of the magazine. This ensures that, to the extent that at least one tab member is contained in the magazine, a constant feed of tab members is achieved at the first opening. Further, this prevents the tab members from becoming loose and disorganised within the magazine. The spring is advantageously a coil spring which takes up little space in the magazine.

The magazine may be formed from a plastic or metal material so that it is tough and hard wearing and suitable to be retained and refilled. In one example, the magazine has an openable or removable side through which the tabs may be inserted. The magazine may be disposable. In this case, the magazine may contain a predetermined number of tabs, such that, when these tabs have been used, the magazine is disposed of. In this case, the number of tabs contained in the magazine may correspond to the number of fasteners supplied to the fastening device. In this way, the tabs will run out at the same time as the fasteners.

The magazine is advantageously formed of a transparent material, allowing a user to see how many tabs remain in the magazine. According to a third aspect of the present invention, there is provided a tab for use with a fastener device such as that in accordance with a first aspect of the present invention, or for use in a magazine according to a second aspect of the present invention. The tab includes a first portion and a second portion, the first and second portions being joined along a hinge such that the free ends of the first and second portions are biased away from each other, the first portion having a different size and/or shape to the second portion such that the second portion of the tab can be retained from moving in a first direction whilst allowing the second portion of the tab to move in the first direction, the tab being removable from a magazine in a second direction generally perpendicular to the first direction.

In one example, the first portion of the tab is shorter than the second portion of the tab. In this way, the retainer may engage the free end of the second portion of the tab, whilst not retaining the free end of the first portion of the tab. In an alternative example, the first portion of the tab has a smaller width than the second portion of the tab. In this way, the retainer may engage the side parts of the second portion of the tab, whilst not engaging the first portion. In this case, the second portion may include side parts that extend beyond the sides of the first portion. Where the tabs are formed with the first and second portions having a uniform width, as this allows the tabs to be cut from a sheet of material in a simple manner with minimum wastage. Where the tabs have a different width at different points along the length, the tabs need to be pressed from a sheet of material, moulded, or cut in a number of different directions. Also, where the tabs have a different width along their length, a number of tabs arranged on a sheet of material may not tessellate, and therefore this will lead to a waste of material when the tabs are cut from the sheet.

An advantage of providing the portions of the tab with different widths rather than different lengths is that the retained portion of the tab can be supported at a desired point along its length. Where the retained portion of the tab is retained by virtue of a longer length, it can only be supported at its free end, and so the hinged end will not be supported. This may be disadvantageous in some cases.

The tabs may have an attractive shape for presentational purposes. In this case, the magazine may include some features complimentary to the shape of the tabs to hold these in alignment.

The hinge of the tab is advantageously merely a fold between the first and second portions of the tab.

The tab is preferably formed from a plastics material, and more preferably from polypropylene. A tab formed from a plastics material has suitable resiliency along the hinge or fold joining the first and second portions, to ensure that the first and second portions of the tab are biased away from each other. Additionally, where it is desired to remove a staple holding a tab and a plurality of sheets together, a tab formed from a plastics material is strong enough that the portions thereof may be gripped and pulled away from the sheets of material causing the legs of the staple to open, thus releasing the sheets. As an alternative, the tab may be formed from a cardboard, stiff paper or fabric material. The tabs may be stamped out from a sheet of material, however it is preferred that the tabs are cut from a sheet of material. However, this may depend on the shape of the tab. Forming the tab members in this way allows a large quantity to be produced very quickly and cheaply. The tab preferably has a thickness of between about 0.1mm and 0.75mm, and preferably of about 0.25mm. The thickness of the tab can be varied depending on their intended use. For example, a tab for heavy duty staple machines may be thicker than those for desk-top staplers that generally only staple a few sheets of thin paper.

Whilst the tabs may be moulded, rather than being cut or stamped, this may be too expensive, and may result in the tabs being too thick.

In one example, a number of tab members are releasably fastened together so that they may be handled conveniently as a single unit. Where tabs are provided separately from the magazine, the fastening means may be maintained, removed or broken when the tab members are placed in the magazine.

Optionally, the tabs may be provided with printed matter so as to form labels. This printing may include instructions for their use, or other information such as the name of the company providing the items that are joined together using

the tab. The tabs may be provided in different colours, and in this case the different colours may be used to signify different types of document.

According to a fourth aspect of the present invention, there is provided a method of joining items using the tabs of the third aspect of the present invention, which may be provided in a magazine according to the second aspect of the invention, for example being used in a fastening device according to the first aspect of the present invention. A method of fastening according to the fourth aspect of the present invention includes providing a tab having a first portion and a second portion, the first and second portions being joined along a hinge such that the free ends of the first and second portions are biased away from each other, the first portion having a different size and/or shape to the second portion, restraining second portion of the tab from moving in a first direction whilst allowing the first portion of the tab to move in the first direction, providing a number of items to be staples between the free ends of the first and second portions of the tab, and moving the items in a second direction generally perpendicular to the first direction to abut against the join between the first and second portions of the tab, and continuing the movement of the items to be joined to remove the tab in a second direction generally perpendicular to the first direction, and passing a fastener through the first and second portions of the tab sandwiching the items to be joined.

Elements of different aspects of the present invention may advantageously be combined.

The present invention will be described, by way of example with reference to the accompanying drawings, in which:

Figure 1 shows a partial sectional view of a stapler in accordance with one aspect of the present invention;



Figure 2 shows a first example of a tab according to one aspect of the present invention;

Figure 3 shows a second example of a tab according to one aspect of the present invention;

5 Figure 4 shows an end view of a magazine for use with a first example of tab as shown in Figure 2;

Figure 5 shows a side view of the magazine of Figure 4;

Figure 6 shows an end view of a magazine for use with a second example of tab as shown in Figure 3; and,

10 Figure 7 shows a side view of a number of sheets of paper and a tab joined with a staple.

As shown in Figure 1, a stapler 7 includes a magazine 1 including a number of tabs 2.

A first example of a tab 2 is shown in Figure 2. The tab 2 is formed from a strip of material, such as cardboard or a plastics material. The tab 2 includes  
15 a first portion 3 and a second portion 4. The first and second portions 3,4 are joined by a hinge 10. The first and second portions 3,4 are arranged non-symmetrically with respect to the hinge 10, namely the first portion 3 has a different size and/or shape to the second portion 4. In the arrangement  
20 shown in Figure 2, the first portion 3 is shorter than the second portion 4. The tab 2 is made from a material having some resiliency, such that the free end of the first portion 3 is biased away from the free end of the second portion 4. In this way, the tab 2 has an open configuration when unsupported.

A second example of a tab 2 is shown in Figure 3. In this case, the difference  
25 between the first portion 3 and the second portion 4 is that the second portion

4 includes extension portions 12 extending from each side of the second portion 4. This gives the second portion 4 a different size and shape to the first portion 3.

As shown in Figure 1, a number of tabs 2 are stacked in the magazine 1. The tabs 2 are each arranged with the first portion 3 towards an opening 6 of the magazine 1. A spring 5 or other biasing means is provided to bias the tabs 2 towards the opening 6 of the magazine 1.

The opening 6 of the magazine 1 is arranged such that the first portion 3 of the lowermost tab 2 is able to pass through the opening 6, but the second portion 4 of the tab 2 is retained within the magazine 1. Figure 4 shows an end view of a first example of a magazine 1, intended for use with tabs 2 such as shown in Figure 2. The opening 6 of the magazine 1 includes a projection 20. The projection 20 is arranged such that it does not contact the first portion 3 of the lowermost tab 2, but does contact the second portion 4 of the tab 2. As shown in the side view of Figure 5, due to the resilience of the tab 2, the first portion 3, which is not retained by the projection 20, moves through the opening 6 of the magazine 1 in a first direction shown by the arrow A. However, the second portion 4 of the tab 2 is retained by the projection 20. Therefore, the tab 2 is held in place at the opening 6 of the magazine 1, with the portions 3,4 opened away from the hinge 10. However, the tab 2 can be moved in a second direction, as shown by the arrow B into a position such as that shown in Figure 1.

In the case of the tab 2 shown in Figure 3, it will be appreciated that the opening 6 of the magazine 1 will have projections 21 extending from either side of the opening 6 to engage and retain the side portions 12 of the second portion 4 tab 2, as shown in the end view of Figure 6. In this Figure, the first portion 3 of the tab 2 has been omitted for clarity.

In use, the first portion 3 of the lowermost tab 2 in the magazine 1 will be biased through the opening 6 of the magazine 1, whilst the second portion 4 of the tab 2 will be retained by the projection 20 or 21 as shown in Figure 5. A number of sheets of paper or other items to be stapled together are then moved between the first and second portions 3, 4 of the tab 2, in a direction shown by the arrow B in Figure 4. The edge of the items to be joined is guided along a curved or angled surface 40 of the bottom of the magazine to contact the inside of the hinge 10 of the tab 2. The continued movement of the items to be joined in direction B will move the tab 2 in the direction B, and will bring the second portion 4 of the tab 2 out of engagement with the projection 20 or 21. This action will bring the tab 2, and the edge of the items to be joined, into a stapling position shown in Figure 1, with the first and second portions 3, 4 of the tab 2 sandwiching the items to be joined. The stapler mechanism is then actuated in the normal way, for example by pressing the handle 8, to drive a staple through the second portion 4 of the tab 2, through the items to be joined and through the first portion 3 of the tab 2. The legs of the staple are then deformed in the normal manner to lie generally along the rear of the first portion 3 of the tab 2. The resulting sandwich is shown in cross section in Figure 7, in which sheets of paper 25 are sandwiched between the first and second portions 3,4 of a tab 2, and are held in place by a staple 26.

To remove the staple 26, it is merely necessary to pull apart the free ends of the first and second portions 3,4 of the tab 2. This action firstly straightens the legs of the staple 26, and then pulls the straightened legs of the staple 26 through the first portion 3 of the tab 2 and then through the sheets of paper that were held by the staple 26.

It will be appreciated that the "horizontal" stapler described with respect to the drawings, in which the items to be stapled are moved to the stapling position

in a generally horizontal direction, may be replaced by a "vertical" arrangement.

Although the present invention has been described with respect to a manual stapler, it will be appreciated that the present invention is equally applicable to automated staplers, for example electric staplers. In this case, rather than a user needing to press a handle, the stapler detects the presence of items to be stapled in the stapling position, and drives a staple through the items to be joined automatically. The present invention is especially suited to such arrangements, since the items to be joined are positioned between the first and second portions of the tab, and the items are moved with the tab to the stapling position. When the items are detected at the stapling position, for example using a position sensor, the stapling mechanism drives the staple through the items and the tab.

In an alternative example, rather than joining the items using a staple, these may be joined by another fastener, such as a stitch. In this case, when the tab and the items to be joined are in the fastening position, the tab and items are sewn together with a thread driven through the tab and items using a needle. In this case, when the items are to be separated, the two portions of the tab may be pulled apart, breaking the thread and allowing this to be removed.



## CLAIMS

1. A fastening device including a magazine holding at least one tab, the tab having a first portion and a second portion, the first and second portions  
5 being joined along a hinge such that the free ends of the first and second portions are biased away from each other, the first portion having a different size and/or shape to the second portion, the magazine including an opening through which the tab is dispensed, the opening including a retainer for retaining the second portion of the tab from moving in a first direction whilst  
10 allowing the first portion of the tab to move in the first direction, the tab being removable from the magazine in a second direction generally perpendicular to the first direction to a fastening position, and a fastening mechanism for driving joining the tab and items to be joined.
2. A fastening device according to Claim 1, in which the fastener is a  
15 staple.
3. A fastening device according to Claim 1, in which the fastener is in the form of a stitch.
4. A fastening device according to any one of the preceding claims, in which a mechanism is provided for selectively preventing the first portion of  
20 the tab from passing through the opening of the magazine.
5. A fastening device according to Claim 4, in which the mechanism for selectively preventing the first portion of the tab from passing through the opening of the magazine comprises a mechanical means such as a manually actuated sliding member or an electronic push button to close the first  
25 opening in the magazine.

6. A fastening device according to Claim 4 or Claim 5, in which, the magazine may be removed from the fastening device when a tab is not required.
7. A magazine suitable for use in a fastening device according to any one of the preceding claims, the magazine being arranged to hold at least one tab having a first portion and a second portion, the first and second portions being joined along a hinge such that the free ends of the first and second portions are biased away from each other, the first portion having a different size and/or shape to the second portion, the magazine includes an opening through which the tab is dispensed, the opening including a retainer for retaining the second portion of the tab from moving in a first direction whilst allowing the first portion of the tab to move in the first direction, the tab being removable from the magazine in a second direction generally perpendicular to the first direction.
8. A magazine according to Claim 7, in which the retainer is in the form of one or more projections or lips that extend into the opening of the magazine for retaining the second portion of the tab.
9. A magazine according to Claim 8, in which the projection or lip is arranged in a position such that, when the first and second portions of the tab are adjacent each other, the projection extends over an area of the second portion of the tab not covered by the first portion.
10. A magazine according to any one of the Claims 7 to 9, in which the tab members contained in the magazine are biased towards the opening of the magazine.
11. A magazine according to Claim 10, including a resilient biasing means, such as a spring, to bias the tab members towards the opening of the magazine.

12. A magazine according to Claim 11, in which the spring is a coil spring.
13. A magazine according to any one of Claims 7 to 12, formed from a plastic or metal material.
14. A magazine according to any one of Claims 7 to 13, including an  
5 openable or removable side through which the tabs may be inserted.
15. A magazine according to any one of Claims 7 to 14, formed of a transparent material.
16. A fastening device according to any one of Claims 1 to 6, including a magazine in accordance with any one of Claims 7 to 15.
- 10 17. A tab for use with a fastener device, the tab including a first portion and a second portion, the first and second portions being joined along a hinge such that the free ends of the first and second portions are biased away from each other, the first portion having a different size and/or shape to the second portion such that the second portion of the tab can be retained from moving in  
15 a first direction whilst allowing the second portion of the tab to move in the first direction, the tab being removable from a magazine in a second direction generally perpendicular to the first direction.
18. A tab according to Claim 17, in which the first portion of the tab is shorter than the second portion of the tab.
- 20 19. A tab according to Claim 17 or Claim 18, in which the first portion of the tab has a smaller width than the second portion of the tab.
20. A tab according to any one of Claims 17 to 19, in which the hinge of the tab is advantageously merely a fold between the first and second portions of the tab.

21. A tab according to any one of Claims 17 to 20, in which the tab is formed from a plastics material.
22. A tab according to Claim 21, in which the tab is formed from polypropylene.
- 5 23. A tab according to any one of Claims 17 to 22, in which the tabs is stamped or cut from a sheet of material.
24. A tab according to any one of Claims 17 to 23, having a thickness of between about 0.1mm and 0.75mm, and preferably of about 0.25mm.
- 10 25. A plurality of tabs according to any one of Claims 17 to 24, the tabs may be provided with printed matter so as to form labels.
26. A plurality of tabs according to any one of Claims 17 to 25, the tabs being releasably fastened together so that they may be handled conveniently as a single unit.
- 15 27. A plurality of tabs according to Claim 26, in which the plurality of tabs are held together by an encircling band.
28. A magazine according to any one of the Claims 7 to 15, including a plurality of tabs according to any one of Claims 17 to 27.
- 20 29. A magazine according to Claim 28, the magazine having an internal structure shaped to correspond to the tabs, and thereby maintain the tabs in alignment.
30. A fastening device according to any one of Claims 1 to 6, including a tab in accordance with any one of Claims 17 to 27.
31. A method of joining items comprising providing a tab having a first portion and a second portion, the first and second portions being joined along



a hinge such that the free ends of the first and second portions are biased away from each other, the first portion having a different size and/or shape to the second portion, restraining second portion of the tab from moving in a first direction whilst allowing the first portion of the tab to move in the first direction, providing a number of items to be staples between the free ends of the first and second portions of the tab, and moving the items in a second direction generally perpendicular to the first direction to abut against the join between the first and second portions of the tab, and continuing the movement of the items to be joined to remove the tab in a second direction generally perpendicular to the first direction, and passing a fastener through the first and second portions of the tab sandwiching the items to be joined.

32. A method according to Claim 31, in which the tabs are formed in accordance with any one of Claims 17 to 27.


33. A fastening device substantially as shown in or as described with respect to any of the accompanying drawings.

34. A magazine for use with a fastening device substantially as shown in or as described with respect to any of the accompanying drawings.

35. A tab substantially as shown in or as described with respect to any of the accompanying drawings.

36. A method of fastening substantially as described with respect to any of the accompanying drawings.

Fig 1

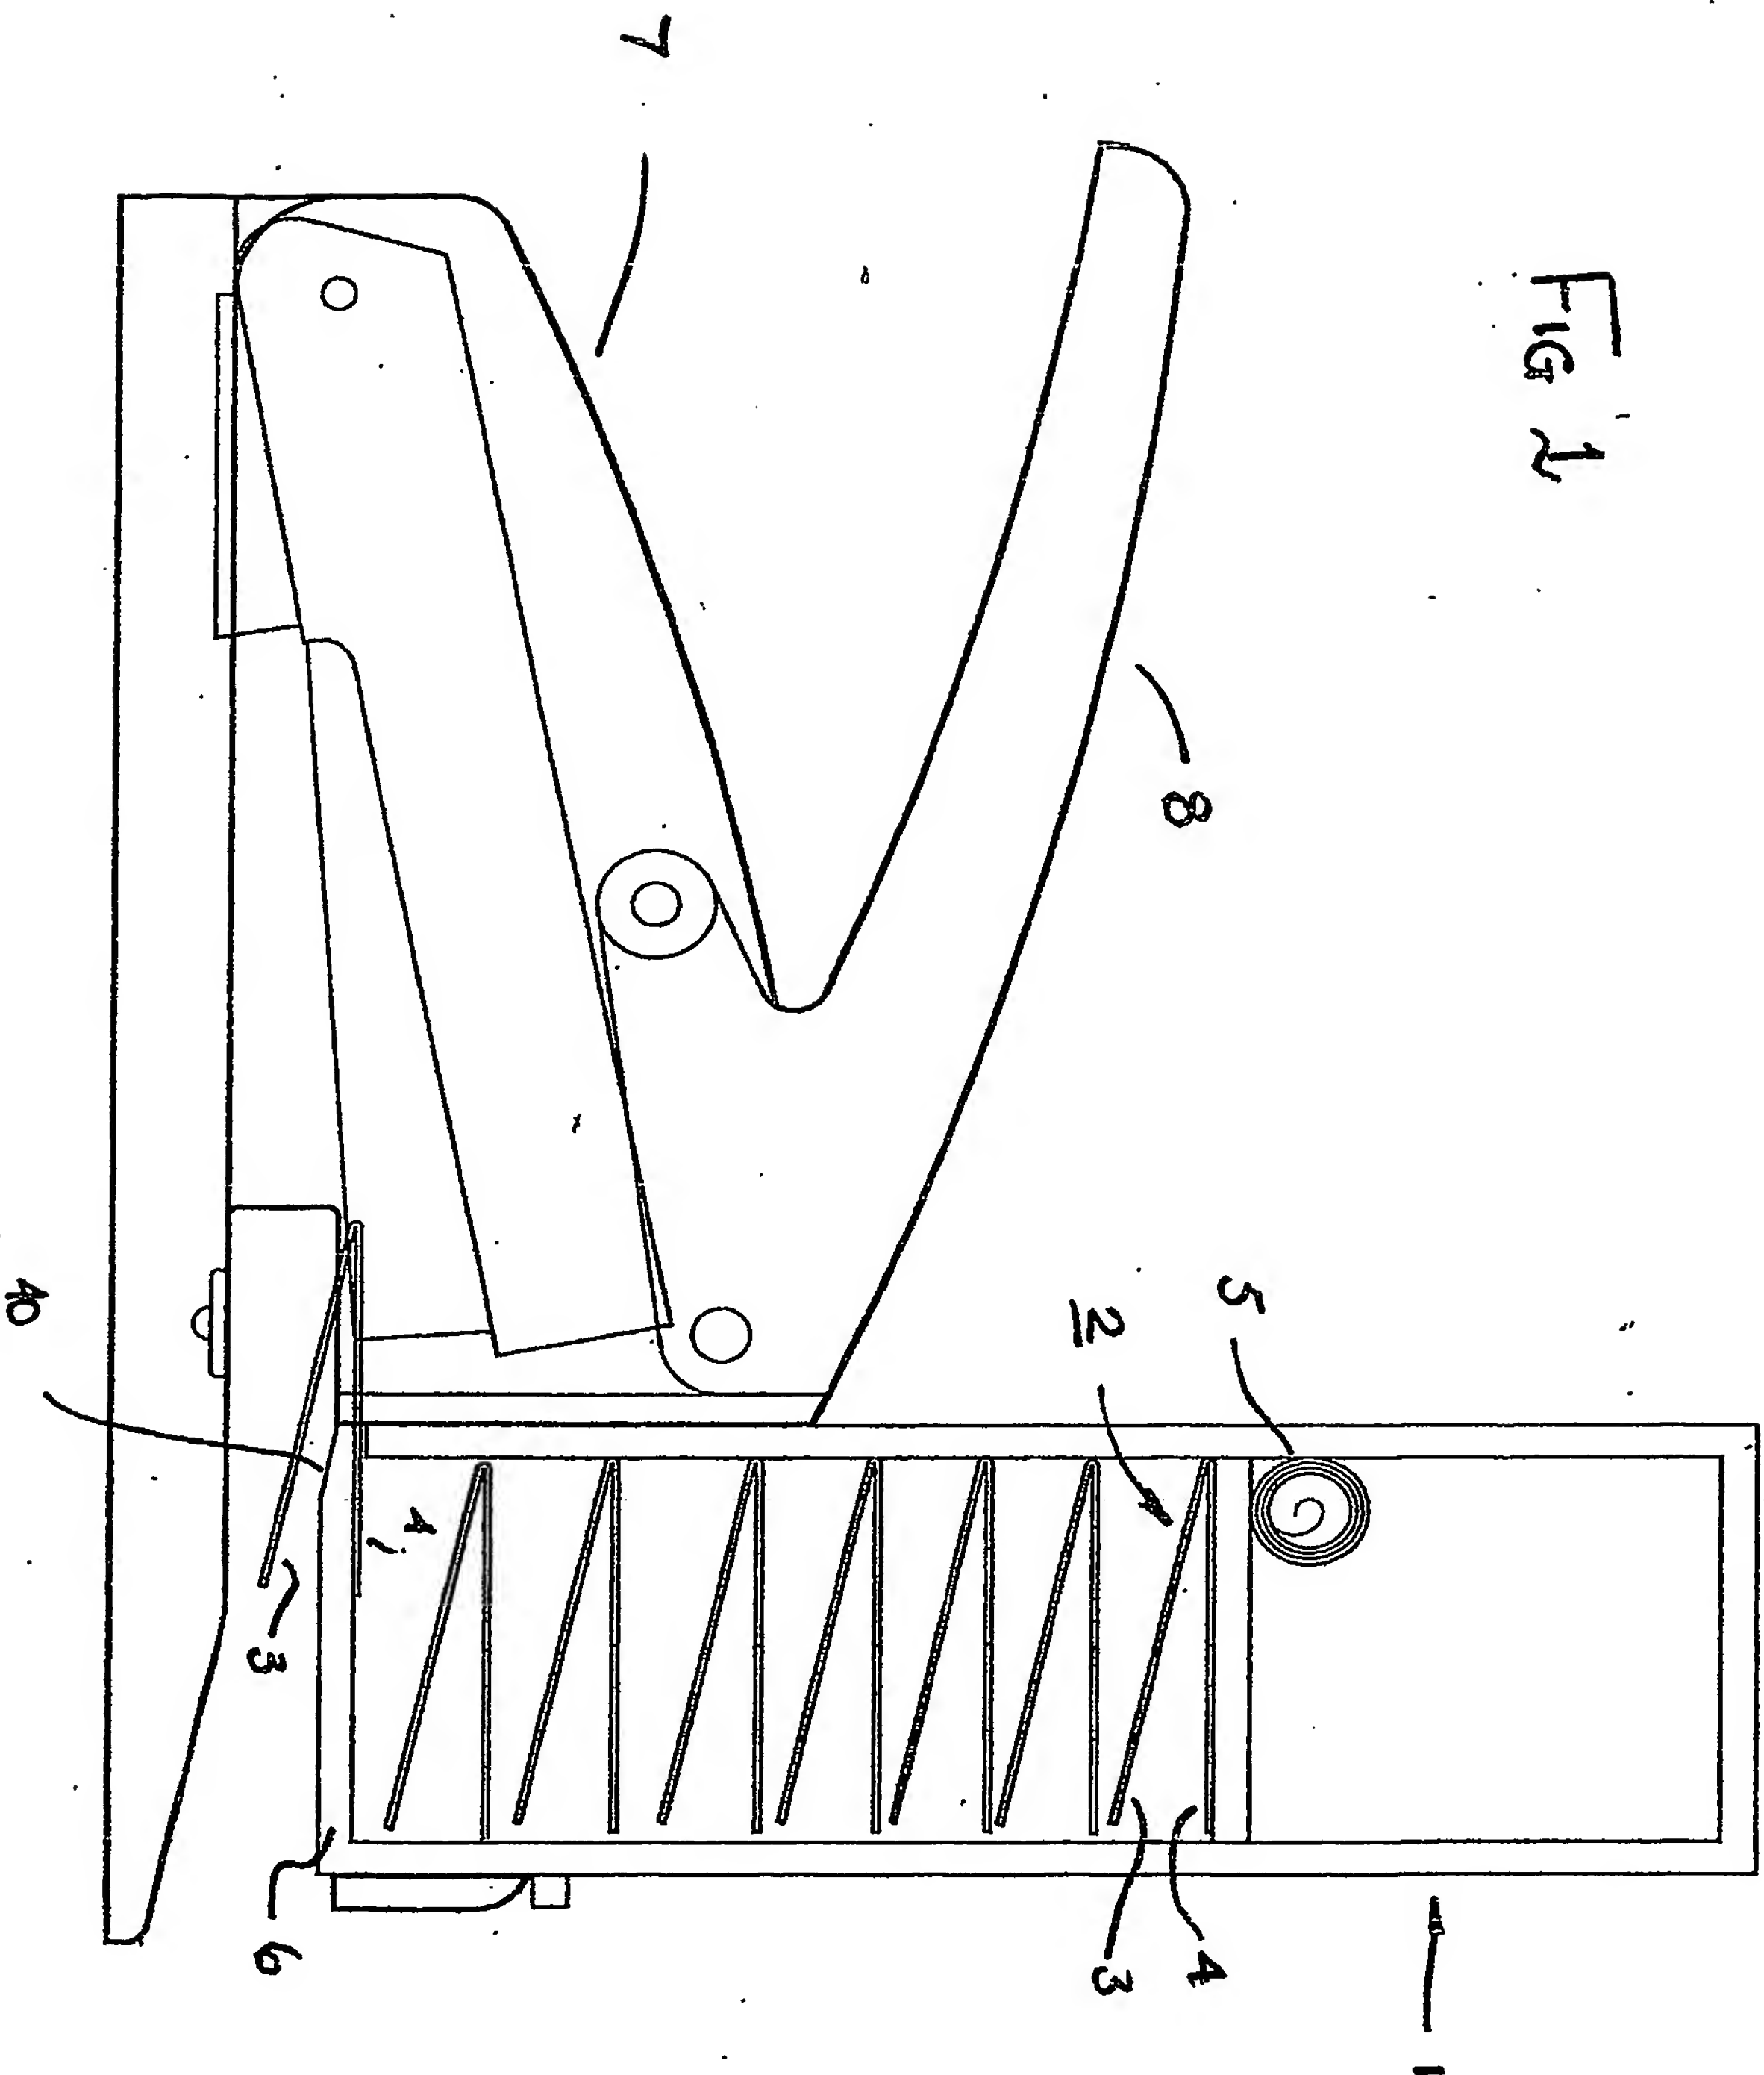

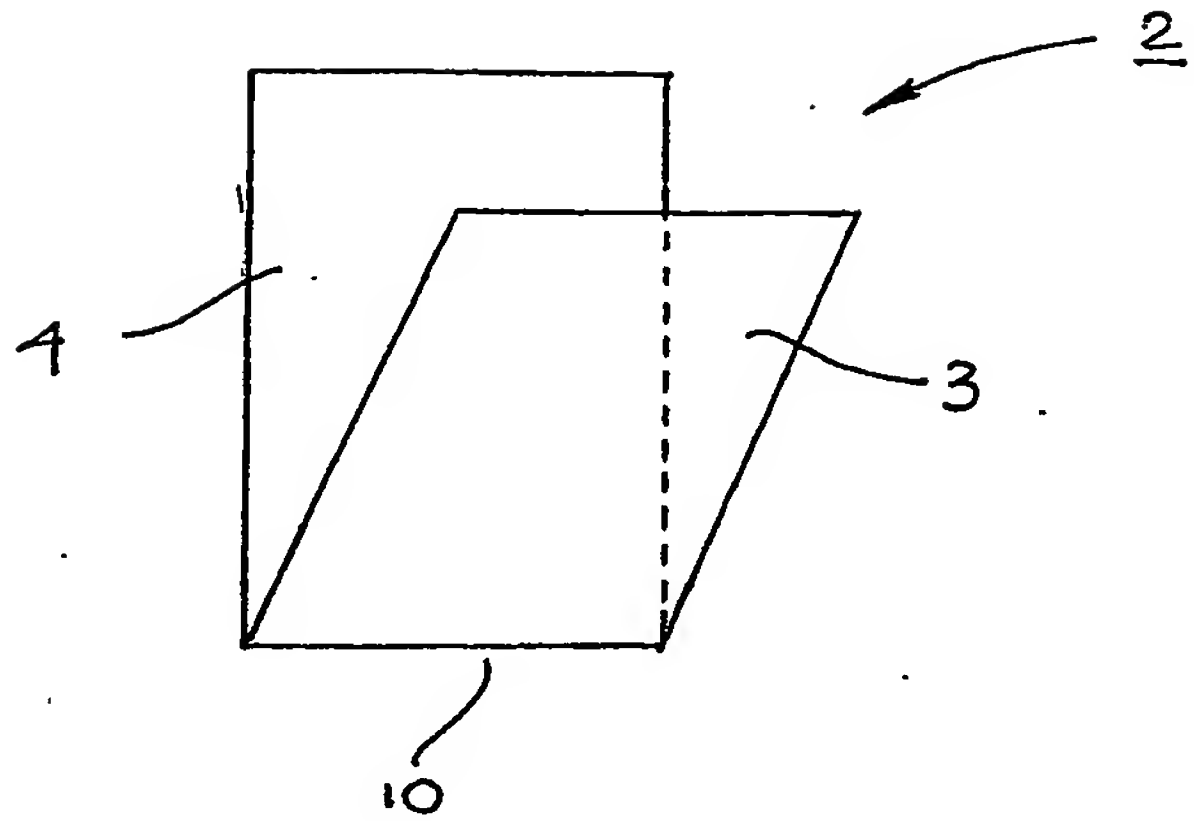


FIG 2

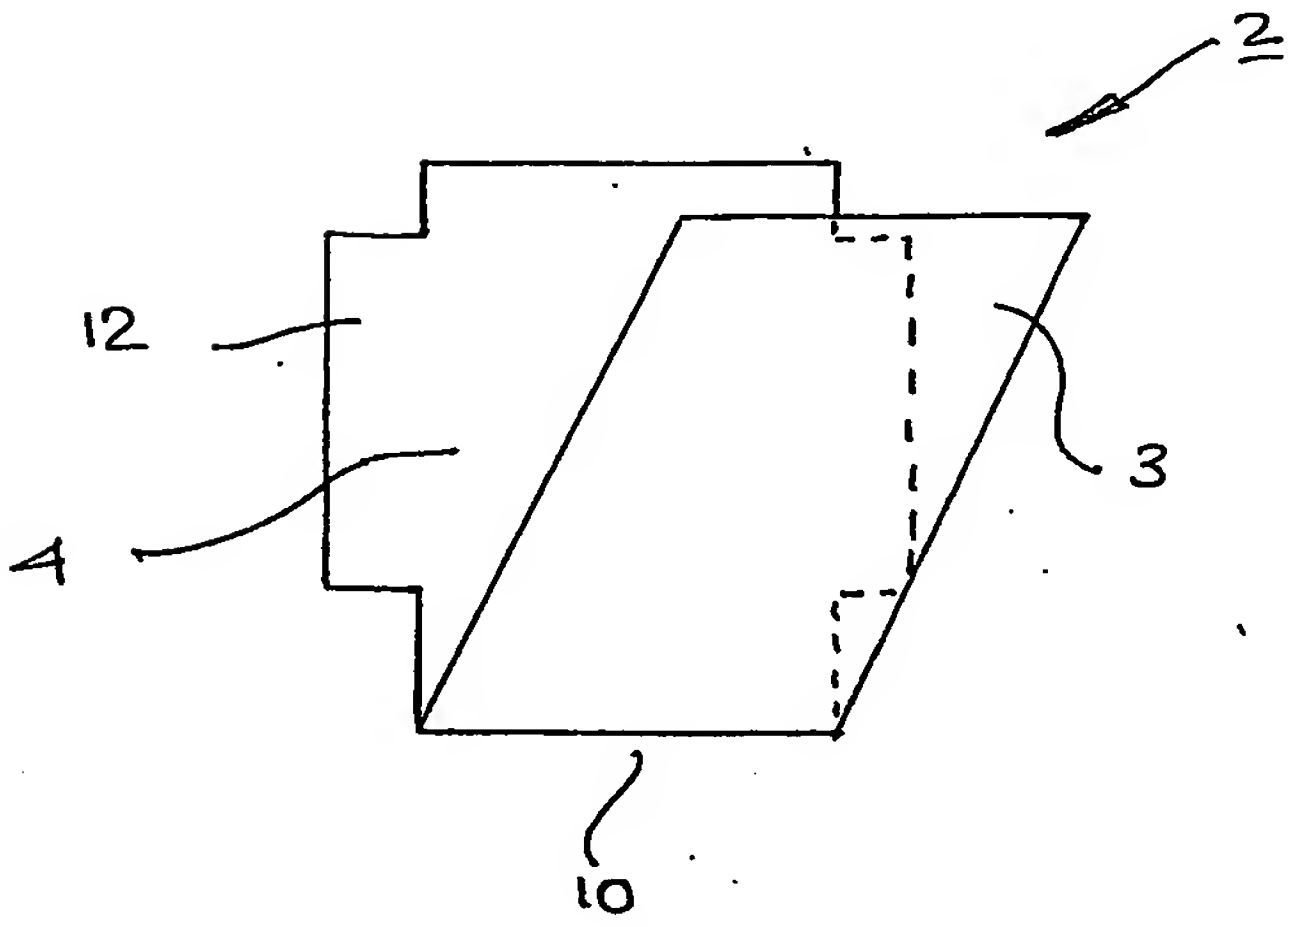


FIG 3





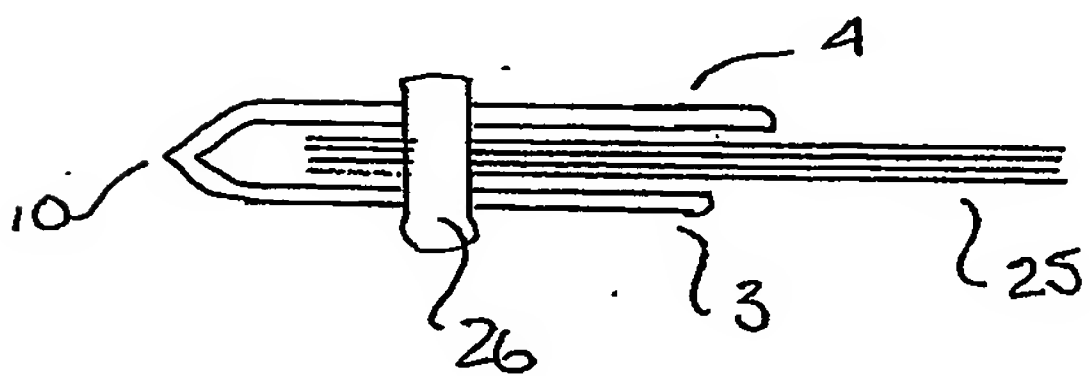


FIG 7

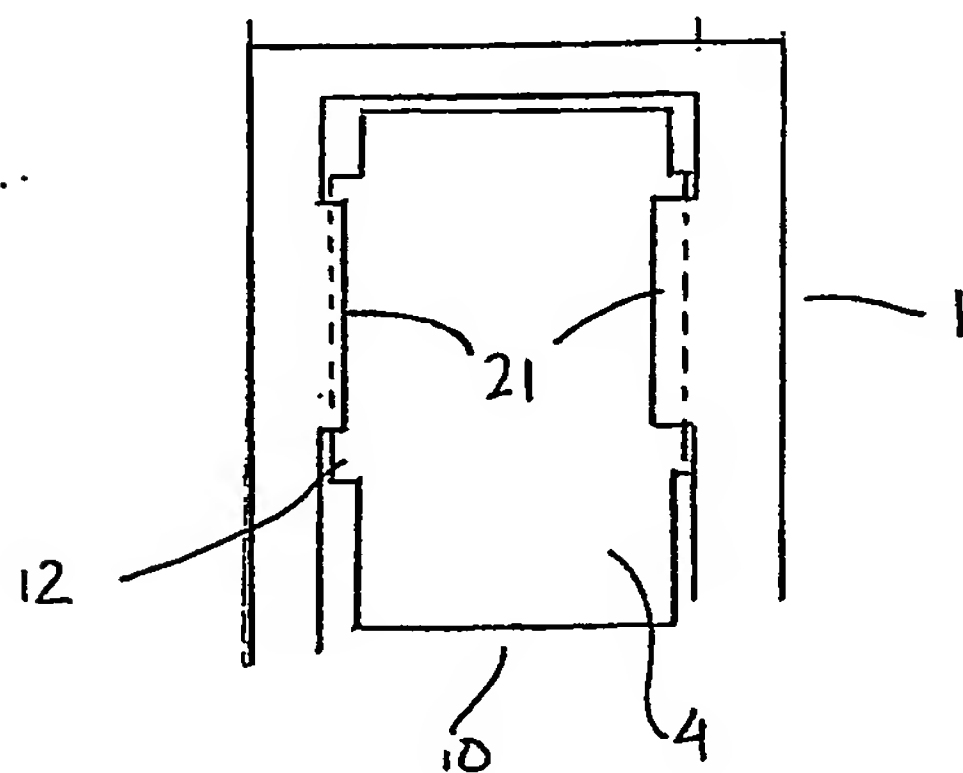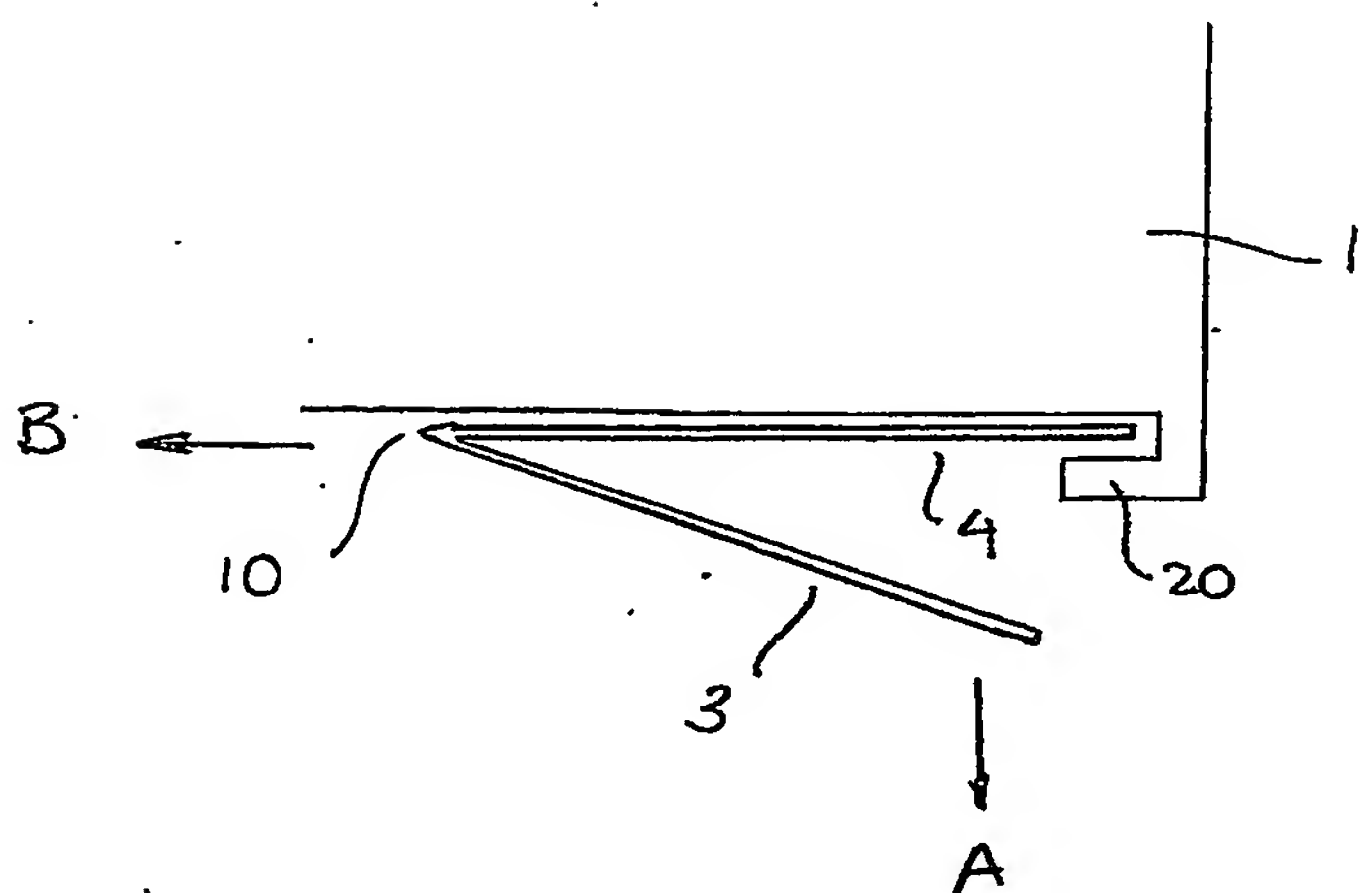

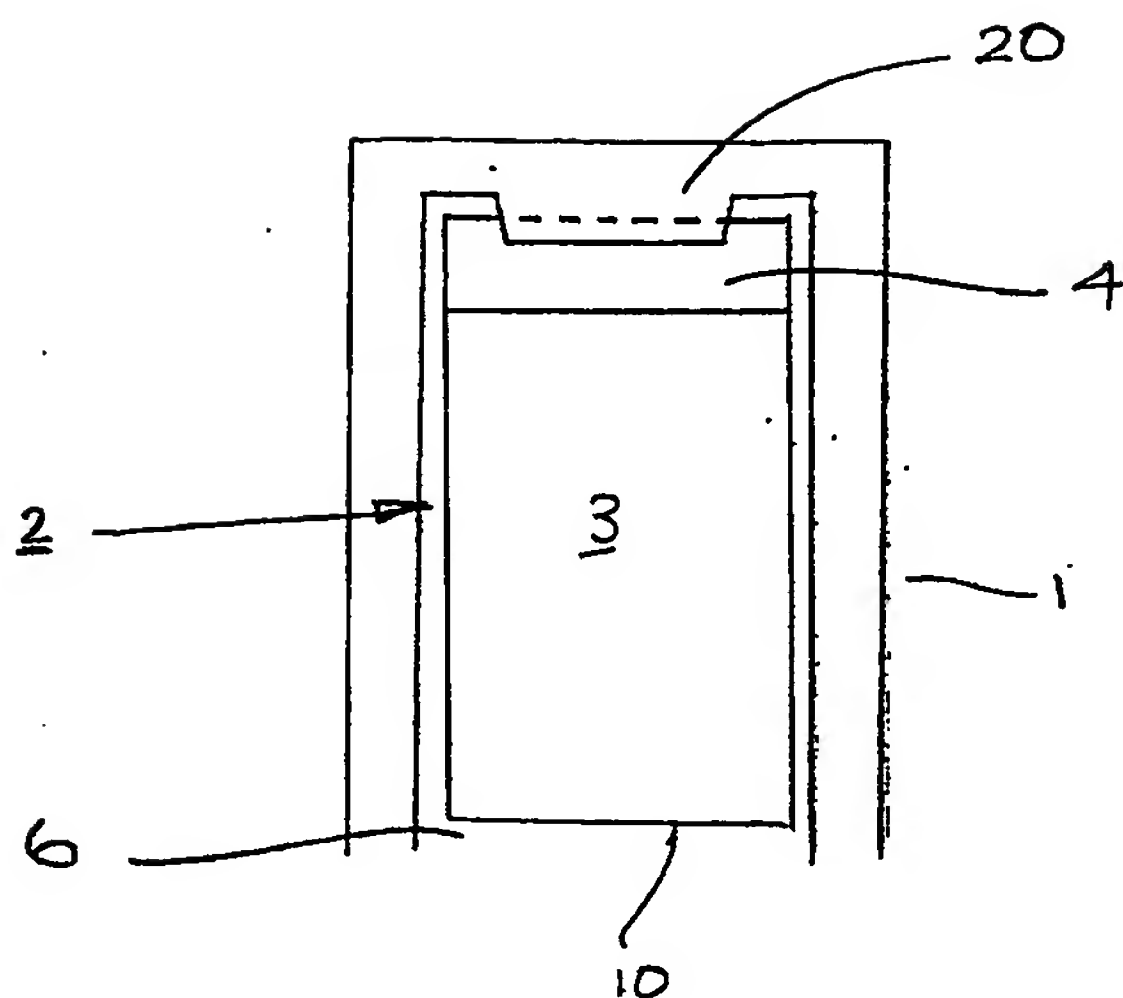

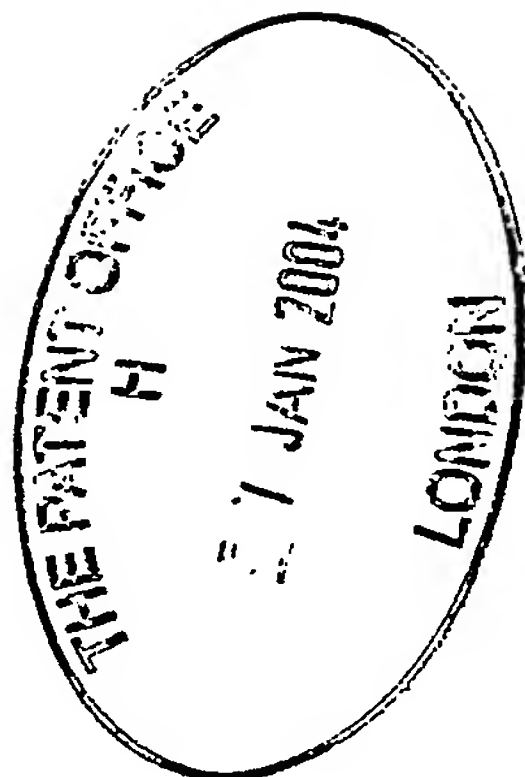

PCT Application  
PCT/GB2004/000032

